



## HYDRAULIC MOTORS TMF

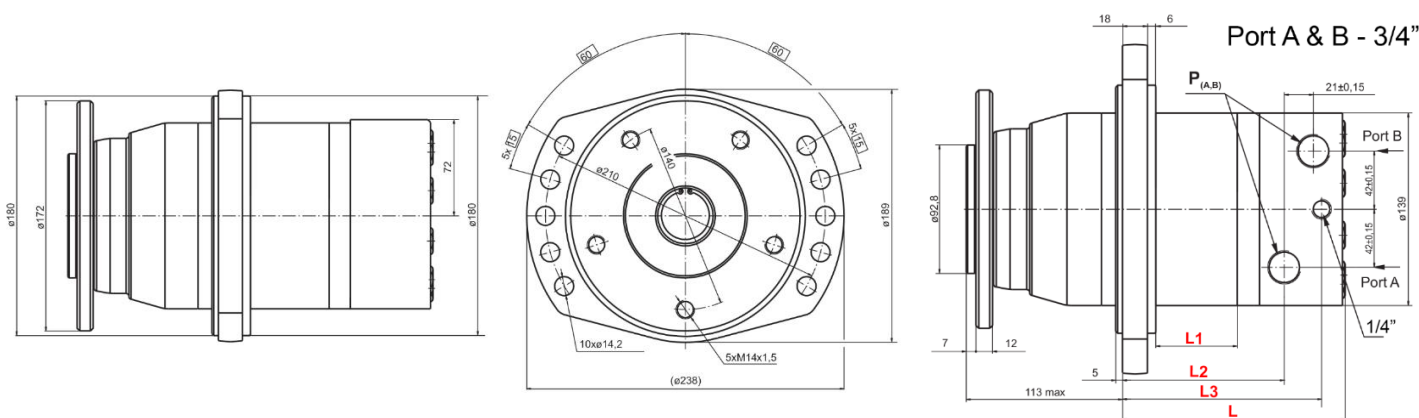


	L [mm]	L1 [mm]	L2 [mm]	L3 [mm]
<b>TMF 200</b>	126	0,98	83	110,3
<b>TMF 250</b>	132,3	31,3	89,3	116,6
<b>TMF 315</b>	141,5	40,5	98,5	125,8
<b>TMF 400</b>	152	51	109	136,3
<b>TMF 470</b>	160	59	117	144,3
<b>TMF 500</b>	166	65	123	150,3
<b>TMF 630</b>	162	61	119	146,3
<b>TMF 725</b>	171	70	128	155,3

		TMF 200	TMF 250	TMF 315	TMF 400	TMF 470	TMF 500	TMF 630	TMF 725
cm/rev.		201,4	251,8	326,3	410,9	475	523,6	631,2	724
Revolution [rpm]	constant	625	500	380	305	260	240	185	170
	with interruptions	750	600	460	365	315	285	225	215
Torque [Nm]	constant	74	90	116	147	171	172	175	160
	with interruptions	102	128	163	206	215			192
	max.	115	144	186	235	240		250	240
Power [kW]	constant	41					37,5	28	26
	with interruptions	65	70			55	51	42	40
Pressure [bar]	constant	250					230	185	160
	with interruptions	350					280	225	210
	max.	400					320	270	260
Oil flow [L/min]	constant	125							
	with interruptions	150							
Thread		3/4"							
Weight [kg]		26,9	27,3	28,1	29	29,7	30,2	29,7	31


## TMF 200

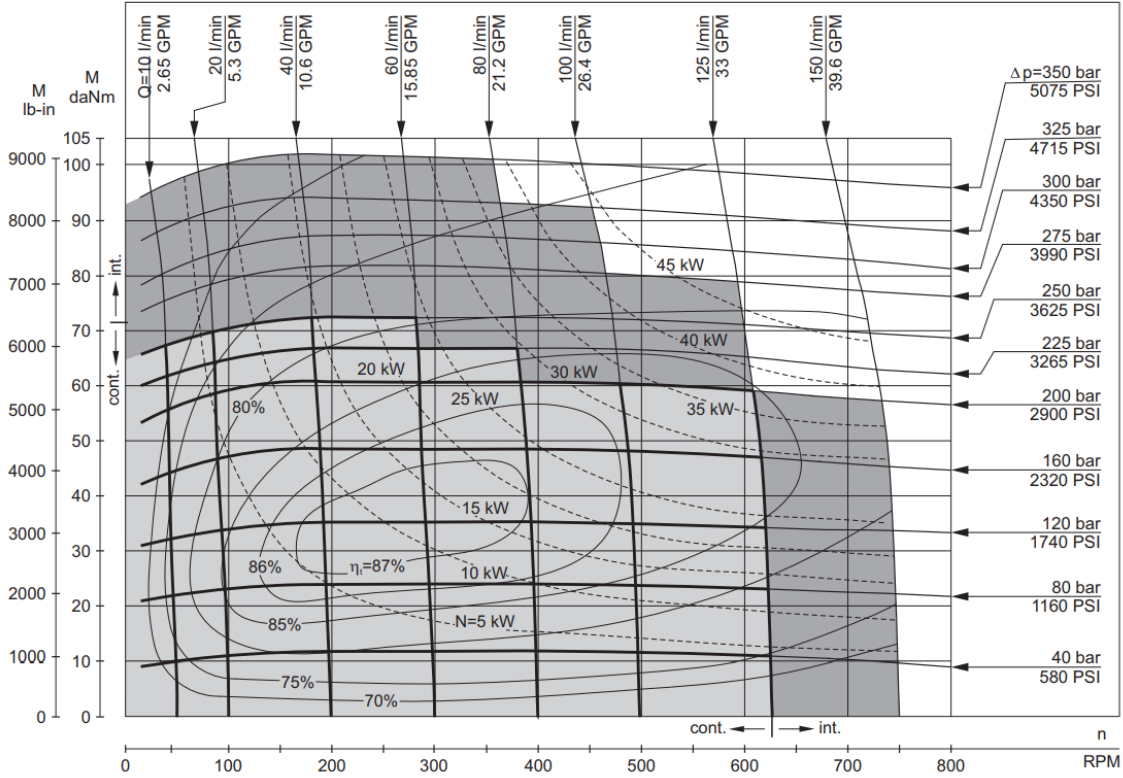


## TMF 250

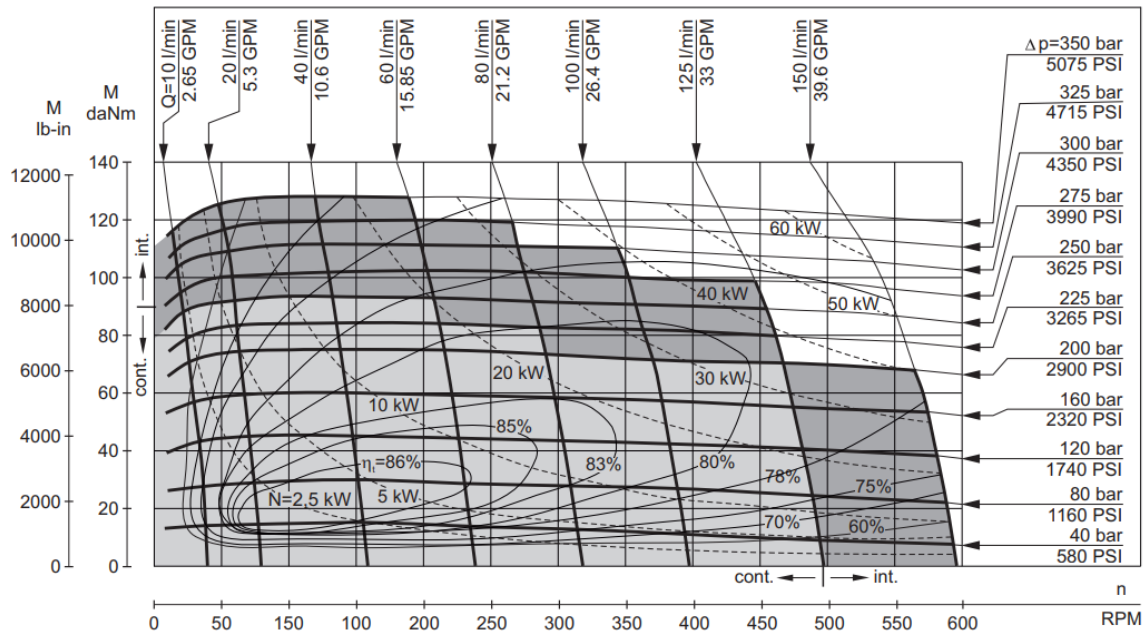


## TMF 315

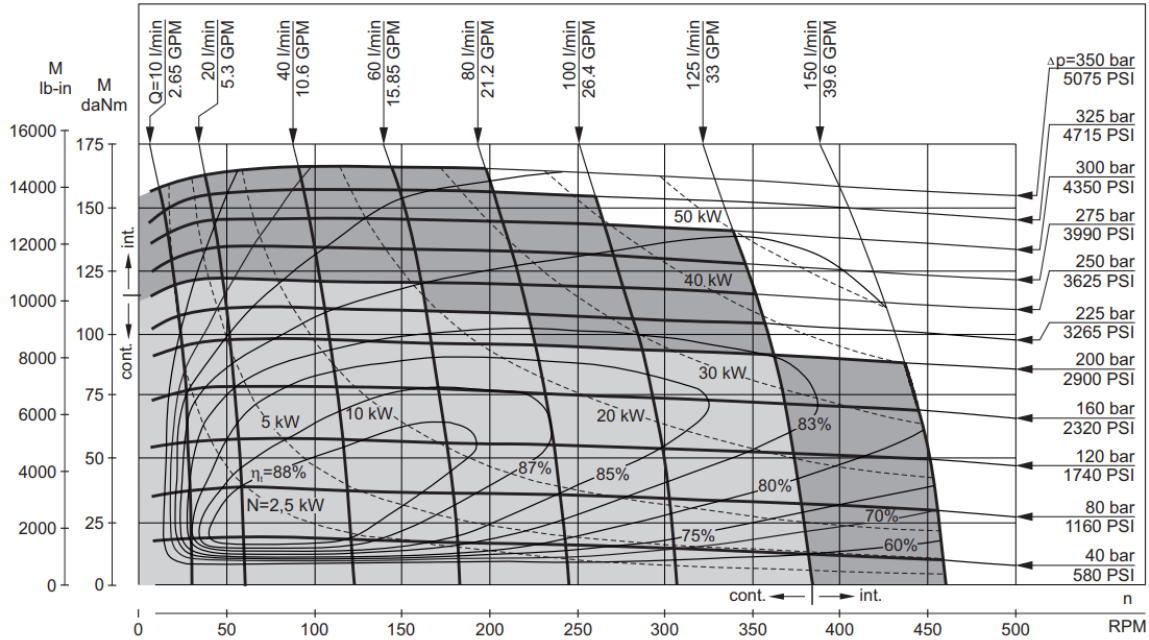


## TMF 400

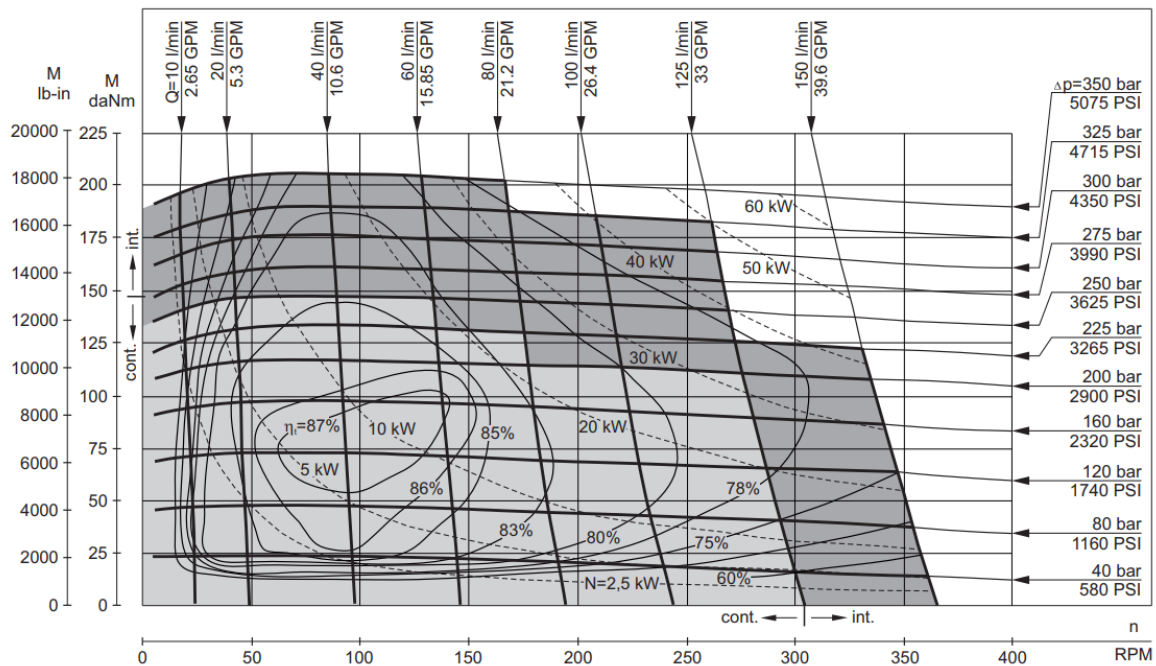

## TMF 470

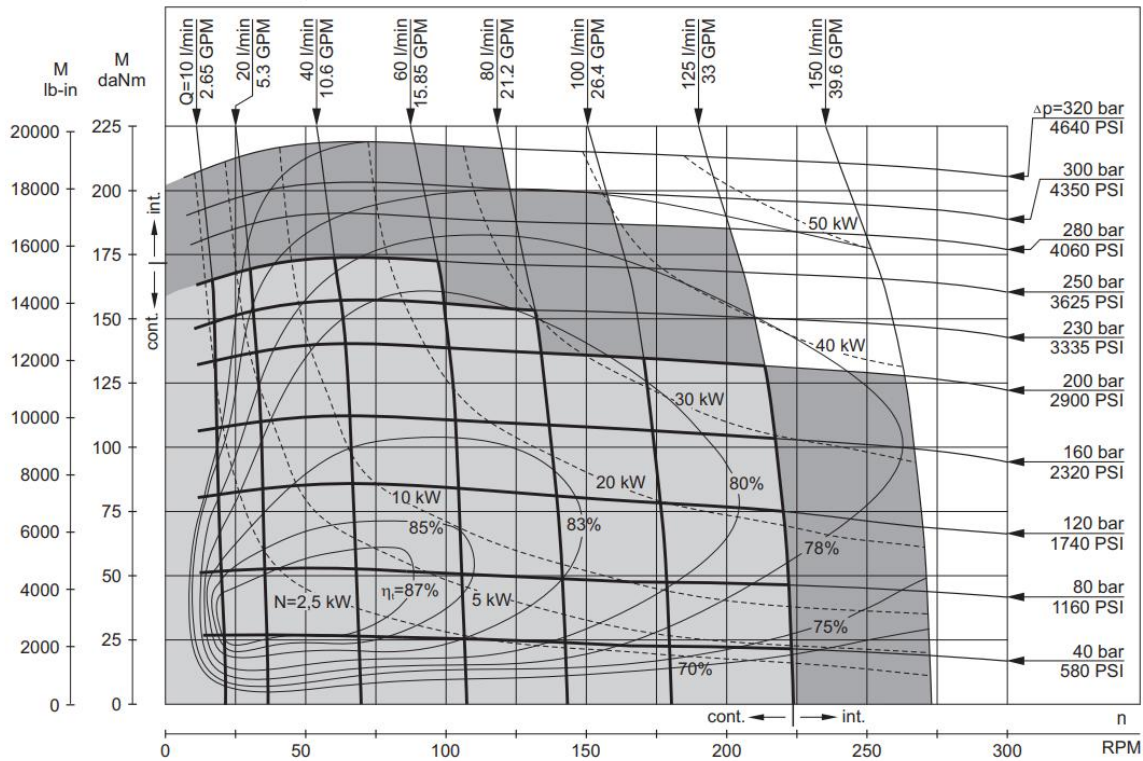


## TMF 500

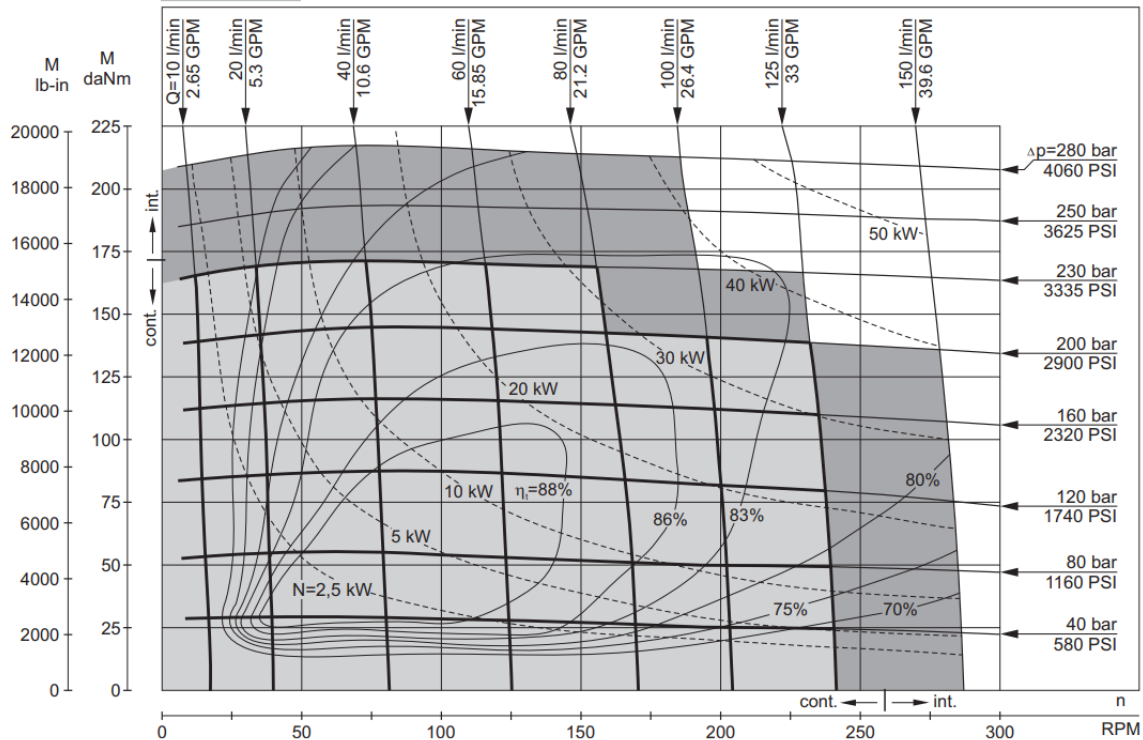



## TMF 630

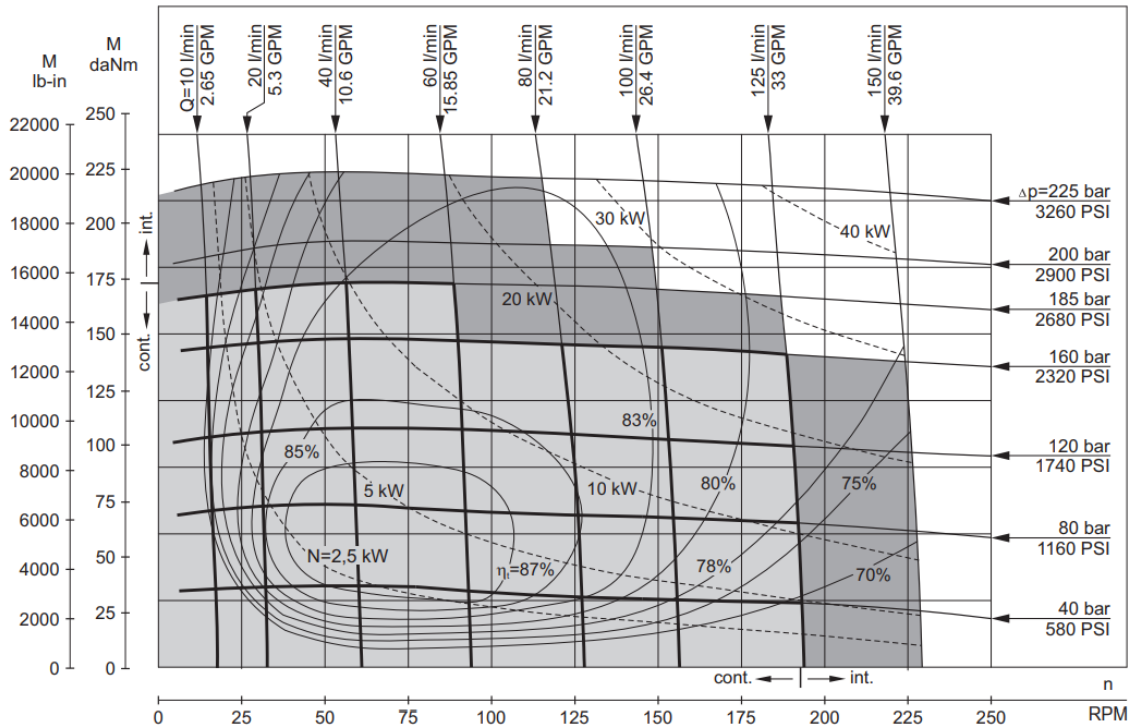

## TMF 725

